35/40/45D-9K
50DA-9K

Diesel Counterbalance Trucks

MOVING YOU FURTHER

HYUNDAI MATERIAL HANDLING



Some of the photos may include optional equipment.

HYUNDAI MATERIAL HANDLING

Head Office (Sales office)
First tower, 55, Bundang-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea

PLEASE CONTACT

www.hyundai-ce.com 2018. 07 Rev. 7

Your satisfaction is **our priority!**

Hyundai introduces a new life of **9series** diesel forklift truck.
The newly designed 4wheel counterbalances trucks provide every operator comfortable driving, increased productivity and easy maintenance.

New Diesel Forklift with Proven Quality and Advanced Technology

- **Maximum performance**
- **Spacious operator's cab**
- **5.6 inch LCD color monitor**
- **Truck inclination warning system**
- **weight indicator** (optional)
- **OPSS System for safe operation** (optional)
- **Easy serviceability**





Some of the photos may include optional equipment.

High Efficiency &
Optimal Performance




Powerful engine and high technology systems
provide you with enhanced performance
and highest productivity

35/40/45D-9K
50DA-9K



Some of the photos may include optional equipment.

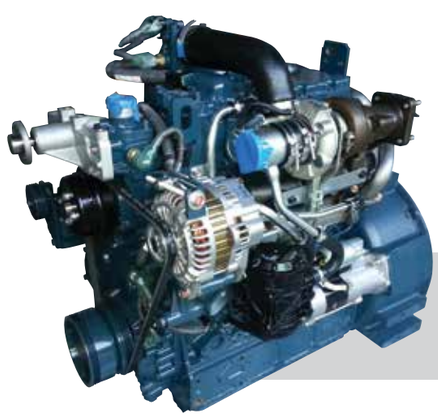

KUBOTA V3800-CR-T Engine
69.2KW / 2,200rpm

The common rail system has made it possible to optimize combustion
and create more durable, quite, and fuel-efficient engine.
This engine meets EPA Tier-III and EU stage IIIA emission regulations.



Highly Durable Transmission

Powershift transmission of forward 2 stages and reverse 2 stages provides fast travel speed and quiet travel under any heavy load condition, and enhances work efficiency.
The clutch protection system prevents excessive use of inching as well as minimizes change-impact.



Boosting type brake valve

The boosting type is applied for strong braking performance.



Highly Durable Drive Axle

The strengthened drive axle separable from transmission ensures low vibration and easy maintenance.
The wet disc type brake is applied for easy operation, smooth response and maintenance free.



Integrated wheel rim

Integrated wheel rim provides significantly increased service life.



Fully hydrostatic power steering

A hydraulic steering system always guarantees smooth and flexible steering, preventing overrun and kick-back.



Travel Speed (MAX)

Model	km / h
35D-9K	27.7
40D-9K	26.8
45D-9K	26.2
50DA-9K	26.7

Gradeability (MAX)

Model	% (degree)
35D-9K	48.2 (25.7)
40D-9K	42.7 (23.1)
45D-9K	38.8 (21.2)
50DA-9K	35.4 (19.5)

Faster Travel Speed and Gradeability

The powerful high-output engine provides greater acceleration, better gradeability and faster travel speed on any tough terrain or slope.

Best Convenience &
Optimized Ergonomics



The ergonomically designed cabin and
the new style LCD color monitor provide full support and
comfort to the operator

35/40/45D-9K
50DA-9K



Spacious Operator Cabin

The newly designed cabin provides wide visibility and spacious environment, ensuring all day comfort for the operator.



Optimized Pedal Position

The pedals are mounted to the console to reduce operator fatigue, and noise and dust from the engine compartment.



Adjustable Steering Wheel


To achieve a comfortable drive position, the angle of the steering column can easily be adjusted by a lever on the right-hand side of the steering column.



Grammer Seat (STD)

Easily adjustable suspension seat, based on a human engineering design, reduces operator fatigue and provides greater comfort.

*ELR (Energy Locking Retractor) Type Seat Belt
*Movable Armrest
*Heating (OPT), Backrest Ext

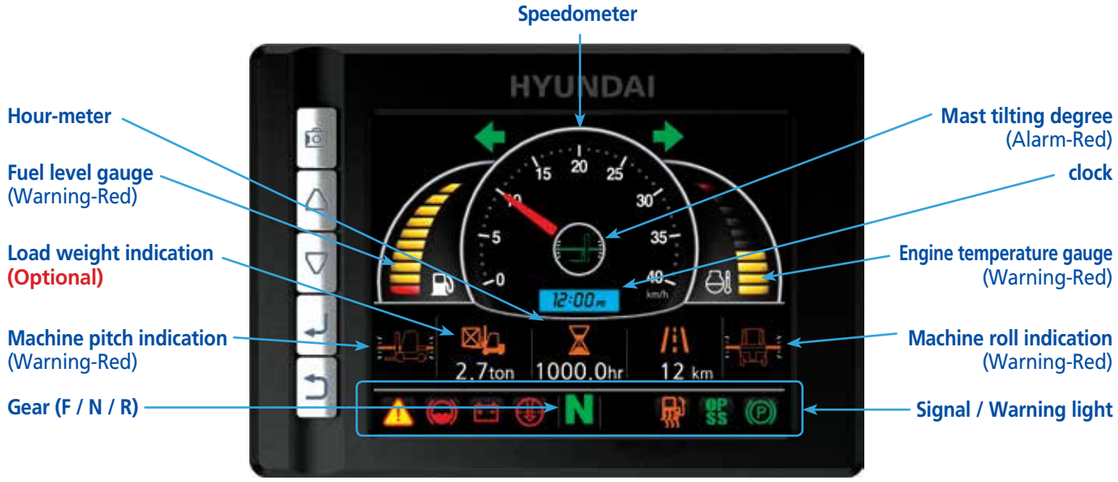


※Mast Tilting Degree is displayed when auto tilt leveling option is selected.

Advanced LCD Monitor

The 5.6 inch wide screen LCD color monitor allows the operator to control the machine with ease.
The monitor features speed, travel direction, battery discharge indicator and hour meter.
The operator can easily check the A/S information through Maintenance Management Display.


Automatic Gear Box

The automatic gear box provides smooth and fast gear change ensuring maximum torque at any speed.
1) The second gear is selected when the travel speed reaches 5 km/h during acceleration.
2) The first gear is selected when the travel speed is at 3 km/h during deceleration.

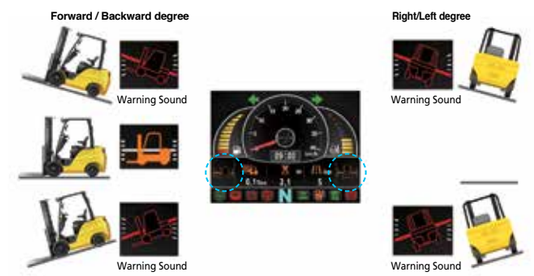

Truck Inclination Warning System

To improve the productivity and safety, the truck inclination warning system will monitor and indicate forward/backward, right / left degree of the forklift.
The alarm alerts the operator when the forklift degree is over the ISO standard.

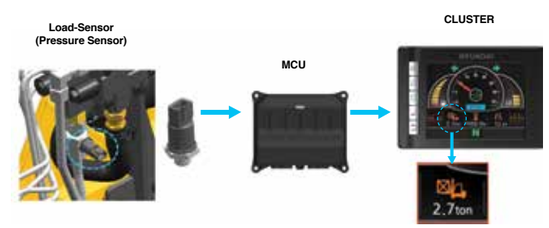

Weight indicator (Optional)

The optional load indicator displays the load weight in the monitor.
The load sensor reduces the time to check loaded weight and the alarm alerts the driver when overloaded.

Advanced **Safety**



The safely designed driver's space makes
your operating more comfortable.

35/40/45D-9K
50DA-9K



Some of the photos may include optional equipment.

Excellent visibility for safe operation

Optimized lift cylinder arrangement provides operator with wider visibility.
The panoramic mirror expands the driver's view when backing up.



Strong overhead guard

The safety overhead guard exceeds EEC and
ANSI regulations and protects the operator during
hazardous jobs.



Large entrance step

Wide and non-slip step offers convenience and safety
when entering and exiting truck.

Fork safety features

When the forks are being lowered,
a down-control valve maintains the controlled speed.
The down-safety valve prevents forks from
dropping down in case of sudden
damage of hydraulic line.

OPSS(Operator Presence Sensing System)

When the operator is not in the seat all mast and
drive movements are impossible.

Lift Lock Tilt Lock Drive Lock



Some of the photos may include optional equipment.









Safety lamps & rear reflectors

LED combination lights and halogen headlights offer the driver visibility in all circumstances.
Rear reflectors mounted on the counterweight enhance safety for the driver and the application.

Fast and Easy **Maintenance**

An ideal arrangement of components ensures
easy access and convenience for maintenance

35/40/45D-9K
50DA-9K



Some of the photos may include optional equipment.

Large Engine Hood

Highly accessible engine compartment assures fast and efficient maintenance.
The enlarged air cleaner(8'') extended service time of engine.



· Rear view camera (Optional)

· Emergency switch (Optional)


· Rear work lamp (Optional)

Some of the photos may include optional equipment.



Waterproof and Dustproof Cover

Newly developed Waterproof and Dustproof fuse box and relay box are mounted in one place for ease of maintenance.

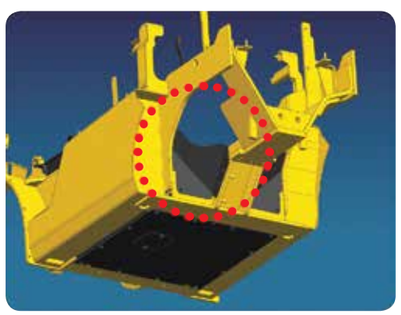


Rear Tire Cover/Under Cover (Optional)


The rear tire cover with PE material is well-suited to prevent clogging of the radiator from foreign substances. The Under cover protect the engine and components from dusts caused by ground. It helps to lengthen Components life.



Maintenance Management display



Password starting system (Anti-theft system)



Key-locking fuel filler

35/40/45D-9K
50DA-9K

Mast Specification (35D-9K)

Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free lift height		Tilt Angle		Load capacity w/o side shift		Load capacity w/side shift		TRUCK WEIGHT (UNLOADED)	
			Single Tire	Double Tire	With Load Backrest	Without Load Backrest	Fwd	Bwd	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire	Double Tire
		mm	mm	mm	mm	mm	deg	deg	kg	kg	kg	kg	kg	kg
2-STAGE LIMITED FREE LIFT	V270	2720	2085	2070	120	120	8	10	3500	3500	3500	3500	5861	6016
	*V300	3020	2235	2220	120	120	8	10	3500	3500	3500	3500	5892	6046
	V330	3320	2385	2370	120	120	8	10	3500	3500	3500	3500	5929	6084
	V350	3520	2535	2520	120	120	8	10	3500	3500	3500	3500	5952	6107
	V370	3720	2635	2620	120	120	8	10	3500	3500	3500	3500	5972	6127
	V400	4020	2845	2830	120	120	8	10	3500	3500	3400	3450	6015	6170
	V430	4320	2995	2980	120	120	8	10	3500	3500	3350	3400	6045	6199
	V450	4520	3095	3080	120	120	8	6	3500	3500	3300	3350	6128	6282
	V500	5020	3345	3330	120	120	8	6	3400	3500	3200	3250	6178	6333
2-STAGE FULL FREE LIFT	VF280	2805	2135	2120	931	1258	8	8	3500	3500	3500	3500	5902	6055
	VF300	3005	2235	2220	1031	1358	8	8	3500	3500	3500	3500	5929	6081
	VF315	3155	2325	2310	1121	1448	8	8	3500	3500	3500	3500	5948	6100
3-STAGE FULL FREE LIFT	TF/TS370	3730	2035	2020	822	1149	8	8	3500	3500	3350	3450	6118	6273
	TF/TS400	4030	2135	2120	922	1249	8	8	3500	3500	3300	3400	6148	6303
	TF/TS430	4330	2235	2220	1022	1349	8	8	3500	3500	3250	3350	6179	6334
	TF/TS450	4510	2295	2280	1082	1409	8	8	3500	3500	3200	3300	6198	6353
	TF/TS470	4720	2385	2370	1172	1499	8	8	3400	3500	3150	3250	6235	6389
	TF/TS500	5020	2485	2470	1272	1599	8	6	3300	3400	3100	3200	6258	6412
	TF/TS550	5520	2665	2650	1452	1779	8	6	3200	3300	2850	3100	6319	6474
	TF/TS600	6030	2845	2830	1632	1959	8	6	3100	3200	2450	3000	6387	6542
	TF/TS650	6540	3025	3010	1812	2139	8	6	3000	3000	2350	2900	6429	6584

Mast Specification (40D-9K)

Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free lift height		Tilt Angle		Load capacity w/o side shift		Load capacity w/side shift		TRUCK WEIGHT (UNLOADED)	
			Single Tire	Double Tire	With Load Backrest	Without Load Backrest	Fwd	Bwd	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire	Double Tire
		mm	mm	mm	mm	mm	deg	deg	kg	kg	kg	kg	kg	kg
2-STAGE LIMITED FREE LIFT	V270	2720	2085	2070	120	120	8	10	4000	4000	4000	4000	6305	6411
	*V300	3020	2235	2220	120	120	8	10	4000	4000	4000	4000	6335	6441
	V330	3320	2385	2370	120	120	8	10	4000	4000	4000	4000	6373	6479
	V350	3520	2535	2520	120	120	8	10	4000	4000	4000	4000	6396	6502
	V370	3720	2635	2620	120	120	8	10	4000	4000	3950	3950	6416	6522
	V400	4020	2845	2830	120	120	8	10	4000	4000	3900	3900	6459	6565
	V430	4320	2995	2980	120	120	8	10	4000	4000	3850	3850	6488	6595
	V450	4520	3095	3080	120	120	8	6	4000	4000	3800	3800	6571	6678
	V500	5020	3345	3330	120	120	8	6	3900	4000	3700	3700	6622	6728
2-STAGE FULL FREE LIFT	VF280	2805	2135	2120	916	1243	8	8	4000	4000	4000	4000	6346	6449
	VF300	3005	2235	2220	1016	1343	8	8	4000	4000	4000	4000	6372	6475
	VF315	3155	2325	2310	1106	1433	8	8	4000	4000	4000	4000	6392	6494
3-STAGE FULL FREE LIFT	TF/TS370	3730	2035	2020	807	1134	8	8	4000	4000	3900	3950	6562	6633
	TF/TS400	4030	2135	2120	907	1234	8	8	4000	4000	3850	3850	6592	6663
	TF/TS430	4330	2235	2220	1007	1334	8	8	4000	4000	3800	3800	6623	6694
	TF/TS450	4510	2295	2280	1067	1394	8	8	4000	4000	3800	3800	6642	6713
	TF/TS470	4720	2385	2370	1157	1484	8	8	4000	4000	3700	3750	6678	6749
	TF/TS500	5020	2485	2470	1257	1584	8	6	3900	3900	3600	3650	6702	6772
	TF/TS550	5520	2665	2650	1437	1764	8	6	3700	3800	3350	3500	6763	6834
	TF/TS600	6030	2845	2830	1617	1944	8	6	3600	3600	2950	3400	6831	6902
	TF/TS650	6540	3025	3010	1797	2124	8	6	3500	3500	2850	3300	6873	6944

Mast Specification (45D-9K)

Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free lift height		Tilt Angle		Load capacity w/o side shift		Load capacity w/side shift		TRUCK WEIGHT (UNLOADED)	
			Single Tire	Double Tire	With Load Backrest	Without Load Backrest	Fwd	Bwd	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire	Double Tire
		mm	mm	mm	mm	mm	deg	deg	kg	kg	kg	kg	kg	kg
2-STAGE LIMITED FREE LIFT	V270	2720	2085	2070	120	120	8	10	4500	4500	4500	4500	6718	6827
	*V300	3020	2235	2220	120	120	8	10	4500	4500	4500	4500	6748	6857
	V330	3320	2385	2370	120	120	8	10	4500	4500	4500	4500	6786	6895
	V350	3520	2535	2520	120	120	8	10	4500	4500	4500	4500	6809	6918
	V370	3720	2635	2620	120	120	8	10	4500	4500	4400	4400	6829	6938
	V400	4020	2845	2830	120	120	8	10	4500	4500	4350	4350	6872	6980
	V430	4320	2945	2980	120	120	8	10	4500	4500	4300	4300	6901	7010
	V450	4520	3095	3080	120	120	8	6	4500	4500	4200	4200	6984	7093
	V500	5020	3345	3330	120	120	8	6	4400	4400	4050	4050	7035	7144
2-STAGE FULL FREE LIFT	VF280	2805	2135	2120	853	1442	8	8	4500	4500	4500	4500	6754	6863
	VF300	3005	2235	2220	953	1542	8	8	4500	4500	4500	4500	6780	6889
	VF315	3155	2325	2310	1043	1602	8	8	4500	4500	4500	4500	6800	6908
3-STAGE FULL FREE LIFT	TF/TS370	3730	2035	2020	796	1114	8	8	4500	4500	4350	4350	6976	7086
	TF/TS400	4030	2135	2120	896	1214	8	8	4500	4500	4300	4300	7006	7116
	TF/TS430	4330	2235	2220	996	1314	8	8	4500	4500	4200	4200	7037	7148
	TF/TS450	4510	2295	2280	1056	1374	8	8	4500	4500	4150	4150	7056	7166
	TF/TS470	4720	2385	2370	1145	1484	8	8	4400	4400	4100	4100	7092	7203
	TF/TS500	5020	2485	2470	1246	1564	8	6	4300	4300	4000	4000	7115	7226
	TF/TS550	5520	2665	2650	1426	1744	8	6	4200	4200	3850	3850	7176	7287
	TF/TS600	6030	2845	2830	1606	1924	8	6	4000	4000	3250	3750	7245	7355
	TF/TS650	6540	3025	3010	1786	2104	8	6	3900	3900	3150	3650	7286	7397


Mast Specification (50DA-9K)


Mast Type		Maximum Fork Height	Overall Height (Lowered)		Free lift height		Tilt Angle		Load capacity w/o side shift		Load capacity w/side shift		TRUCK WEIGHT (UNLOADED)	
			Single Tire	Double Tire	With Load Backrest	Without Load Backrest	Fwd	Bwd	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire 600mm LC	Double Tire 600mm LC	Single Tire	Double Tire
		mm	mm	mm	mm	mm	deg	deg	kg	kg	kg	kg	kg	kg
2-STAGE LIMITED FREE LIFT	V260	2630	2085	2070	120	120	8	10	5000	5000	5000	5000	7143	7259
	*V290	2930	2235	2220	120	120	8	10	5000	5000	5000	5000	7219	7335
	V320	3230	2385	2370	120	120	8	10	5000	5000	5000	5000	7193	7309
	V340	3430	2535	2520	120	120	8	10	5000	5000	4950	4950	7218	7334
	V360	3630	2635	2620	120	120	8	10	5000	5000	4900	4900	7234	7350
	V390	3930	2845	2830	120	120	8	10	5000	5000	4800	4800	7270	7386
	V440	4430	3095	3080	120	120	8	6	4900	5000	4650	4650	7373	7489
	V490	4930	3345	3330	120	120	8	6	4800	4900	4500	4500	7415	7531
2-STAGE FULL FREE LIFT	VF270	2702	2135	2120	905	1223	8	8	5000	5000	4700	4750	7202	7314
	VF290	2902	2235	2220	1005	1323	8	8	5000	5000	4650	4700	7227	7339
	VF305	3052	2325	2310	1095	1413	8	8	5000	5000	4550	4600	7245	7357
3-STAGE FULL FREE LIFT	TF/TS360	3672	2035	2020	807	1074	8	8	5000	5000	4700	4800	7386	7490
	TF/TS390	3972	2135	2120	907	1174	8	8	5000	5000	4650	4700	7413	7516
	TF/TS420	4272	2235	2220	1007	1274	8	8	4900	5000	4550	4600	7438	7541
	TF/TS440	4452	2295	2280	1067	1334	8	8	4800	5000	4500	4550	7454	7558
	TF/TS460	4662	2385	2370	1157	1424	8	8	4700	4900	4450	4500	7477	7581
	TF/TS490	4962	2485	2470	1257	1524	8	6	4600	4800	4350	4450	7503	7606
	TF/TS540	5462	2665	2650	1437	1704	8	6	4500	4700	4250	4300	7555	7658
	TF/TS590	5972	2845	2830	1617	1884	8	6	4400	4600	4100	4200	7595	7699
	TF/TS640	6482	3025	3010	1797	2064	8	6	4300	4500	4000	4100	7636	7740

New 9 Series

35/40/45D-9K
50DA-9K

Dimension

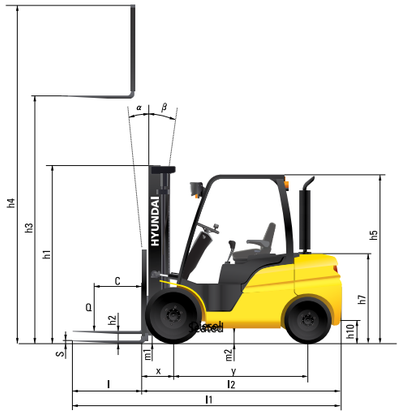

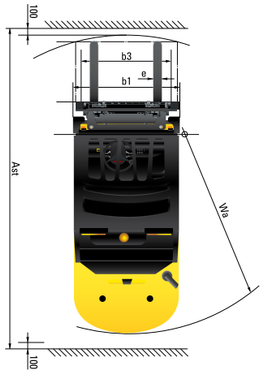


Specification


Identification						
1.1	Manufacturer		Hyundai	Hyundai	Hyundai	Hyundai
1.2	Manufacturer's type designation		35D-9K	40D-9K	45D-9K	50DA-9K
1.3	Drive : electric (battery or mains), diesel, petrol, fuel gas, manual		Diesel	Diesel	Diesel	Diesel
1.4	Type of operation : hand, pedestrian, standing, seated, order-picker		Seated	Seated	Seated	Seated
1.5	Load capacity / rated load	kg	3,500	4,000	4,500	5,000
1.6	Load center distance	c mm	600	600	600	600
1.8	Load distance, center of front axle to fork	x mm	561	561	561	576
1.9	Wheelbase	y mm	2,000	2,000	2,000	2,000
Weights						
2.1	Service weight	kg	5,892	6,441	6,857	7,335
2.2	Axle loading, loaded front / rear	kg	8,220 / 1,172	9,136 / 1,305	9,922 / 1,435	10,780 / 1,555
2.3	Axle loading, unloaded front / rear	kg	2,814 / 3,627	2,814 / 3,627	2,810 / 4,047	2,813 / 4,522
Wheels, Chassis						
3.1	Tires : Pneumatic(P) / Solid(S) / Non-marking(N)		P	P	P	P
3.2	Tires size, front		8.25-15-14PR	7.50-16-12PR	7.50-16-12PR	7.50-16-12PR
3.3	Tires size, rear		7.00-12-12PR	7.00-12-12PR	7.00-12-14PR	7.00-12-14PR
3.5	Wheels, number front rear(x = driven wheels)		2 x 2	4 x 2	4 x 2	4 x 2
3.6	Track width, front	mm	1,132	1,282	1,282	1,282
3.7	Track width, rear	mm	1,140	1,140	1,140	1,140
Basic Dimensions						
4.1	Mast / fork carriage tilt forward / backward	degrees	8 / 10	8 / 10	8 / 10	8 / 10
4.2	Lowered mast height	h1 (mm)	2,235	2,220	2,220	2,220
4.3	Free lift height	h2 (mm)	120	120	120	120
4.4	Lift height	h3 (mm)	3,020	3,020	3,020	2,930
4.5	Extended mast height	h4 (mm)	4,234	4,234	4,234	4,147
4.7	Overhead guard (cab) height	h5 (mm)	2,220	2,210	2,210	2,210
4.8	Seat height / Standing height	h7 (mm)	1,070	1,070	1,070	1,070
4.12	Coupling height	h10 (mm)	364	364	364	364
4.19	Overall length	l1 (mm)	4,180	4,235	4,455	4,500
4.20	Length to face of forks	l2 (mm)	3,110	3,165	3,235	3,300
4.21	Overall width	b1 (mm)	1,370	1,740	1,740	1,740
4.22	Fork dimensions	l x e x s (mm)	1,070 x 122 x 50	1,220 x 150 x 50	1,220 x 150 x 50	1,200 x 150 x 60
4.23	Fork carriage ISO 2328, class / type A, B		III / A	III / A	IV / A	IV / A
4.24	Fork - carriage width	b3 (mm)	1,300	1,600	1,600	1,600
4.31	Ground clearance, loaded, under mast	m1 (mm)	170	155	155	155
4.32	Ground clearance, centre of wheelbase	m2 (mm)	215	205	205	200
4.33	Aisle width for pallets 1,000 x 1,200 crossways	Ast (mm)	4,629	4,676	4,726	4,771
4.34	Aisle width for pallets 800 x 1,200 lengthways	Ast (mm)	4,829	4,876	4,926	4,971
4.35	Turning radius	Wa (mm)	2,868	2,915	2,965	3,010
4.36	Smallest pivot point distance		1,009	1,009	1,009	1,009
Performance Data						
5.1	Travel speed, unloaded (1/2)	km/h	27.7	26.8	26.2	26.7
5.2	Lift speed, loaded / unloaded	mm/s	520 / 540	510 / 540	500 / 540	430 / 460
5.3	Lowering speed, loaded / unloaded	mm/s	500 / 500	500 / 500	500 / 500	500 / 500
5.5	Drawbar pull, loaded	kg	4,526	4,553	4,565	4,573
5.7	Gradient performance, loaded	%	48.2	42.7	38.8	35.4
5.9	Acceleration time, loaded / unloaded(10m)	sec	-	-	-	-
5.10	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic
Engine						
6.1	Engine manufacturer / type		KUBOTA V3800-CR-T			
6.2	Engine power acc. to ISO 1585	kW/rpm	69.2 / 2,200	69.2 / 2,200	69.2 / 2,200	69.2 / 2,200
6.3	Maximum Torque	kgf.m/rpm	33.6 / 1,500	33.6 / 1,500	33.6 / 1,500	33.6 / 1,500
6.4	No. of cylinder / cubic capacity	anz/cm³	4 / 3,769	4 / 3,769	4 / 3,769	4 / 3,769
Other Details						
8.1	Type of drive control		Power shift 2/2	Power shift 2/2	Power shift 2/2	Power shift 2/2
8.2	Operating pressure (system / attach)	kgf/cm²	210 / 150	210 / 150	210 / 150	210 / 150
8.3	Oil volume for attachments	ℓ / min	100	100	100	100

Load Capacity


35D-9K




40D-9K



45D-9K



50DA-9K



Various Attachments

Side Shift



Hinged Fork




Hinged Bucket



Rotating Fork



Push Pull




Rotating Roll Clamp




Load Stabilizer




Carton Clamp




Pallet Invert




Drum Clamp



Bale Clamp



Load Extender



Fork Positioner



Optional Items

- **Fork(mm)**
  35D-9K : 1220, 1370, 1520, 1670, 1820, 1970, 2120, 2400
  40/45D-9K : 1070, 1370, 1520, 1670, 1820, 1970, 2200, 2400
  50DA-9K : 1350, 1500, 1800, 2000, 2400
- **Integral Sideshift**
- **Tire :** Pneumatic(STD) / Solid / Non-marking /
  Double Tire(Front tire) 35D-9K : 7.50-16-12PR
  Single Tire(Front tire) 40D-9K/45D-9K/50DA-9K : 300-15-18PR
- **Seat :** Arm rest, Back rest Ext, heat, seatbelt SW
- **M.C.V :** 2-Spool(STD), 3-Spool, 4-Spool, 5-Spool
- **Weight Indicator**
- **Beacon Lamp (LED)**
- **Work Lamp**
- **OPSS : Travel, Travel + Mast**
- **Cabin (Heater & Air Conditioner)**
- **Rear View Camera**
- **High OHG (2,340mm)**
- **45D-9K : Class III Fork Carriage**